

DIRECTORS:
R H C Worthington
A R J Worthington
N C Worthington

Exclusive Distributor for
Nitto Jushi Kogyo Co. Ltd.
Manufacturers of **CLAREX®**

Weatherall Equipment & Instruments Ltd.
Unit 1, Station Approach, Wendover, Bucks.
HP22 6BN
England


T: +44 (0)1296 622180
F: +44 (0)1296 624955
E: sales@weatherall-uk.com
W: www.weatherall-uk.com

Clarex NIR Filter

CLAREX NIR Filter transmits infra-red rays and absorbs visible rays. There are 5 types of infra-red filters which transmit through the ranges of 670nm to 860nm.

Features:

- Transmit Infra-red light.
- Excellent Optical Characteristics and weather resistance.
- Ideally suited to optical sensor applications due to zero birefringence (double refraction).
- Can be combined with Hard Coat and/or other Optical Coatings (such as Anti Reflection).
- May be combined with Flat (glossy) surface and/or Non-Glare (mat) surface sheet.

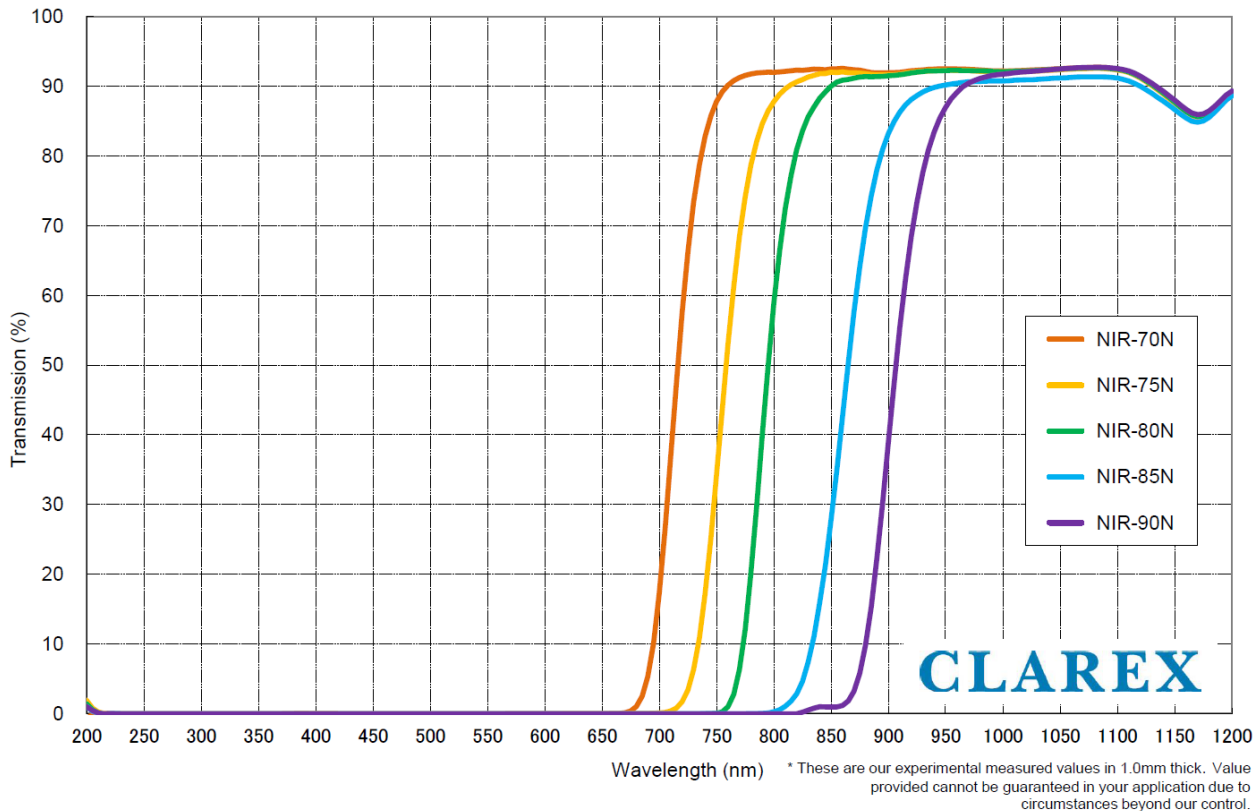

Available Sizes and Thickness:

Size	Available Thickness
400x550mm 1000 x 1000mm	5.0mm, 4.0mm, 3.0mm, 2.0mm, 1.5mm, 1.0mm, 0.8mm, 0.5mm

Please contact us if you require another thickness or size.

Applications:

- Radar sensors / Remote Control / Security IR detection sensor / Eye tracking sensor / etc.
- Bespoke machining and printing available according to the customer's drawings or specification.

DIRECTORS:
R H C Worthington
A R J Worthington
N C Worthington

Exclusive Distributor for
Nitto Jushi Kogyo Co. Ltd.
Manufacturers of **CLAREX®**

Weatherall Equipment & Instruments Ltd.
Unit 1, Station Approach, Wendover, Bucks.
HP22 6BN
England

T: +44 (0)1296 622180
F: +44 (0)1296 624955
E: sales@weatherall-uk.com
W: www.weatherall-uk.com

PROPERTIES	METHOD	UNIT	Normal Grade	Hard Coat Grade
SPECIFIC GRAVITY	ASTM D-792		1.19	1.19
OPTICAL				
Refractive Index	ASTM D-542		1.49	1.49 (1.53)
MECHANICAL				
Elongation	ASTM D-638	%	5	5
Tensile Rupture Strength	ASTM D-638	MPa	70	45
Flexural Rupture Strength	ASTM D-790	MPa	118	60
THERMAL				
Heat Distortion Temperature	ASTM D-648	°C	110	110
Maximum recommended continuous temperature		°C	80	80
Coefficient of Thermal Expansion	ASTM D-696	cm/cm/°C	7×10^{-5}	7×10^{-5}
Specific Heat	ASTM D-638	J/°C	1.47	1.47
DURABILITY				
Hot Resistance	80°C x 100hr		No Change	No Change
Cold Resistance	-40°C x 100hr		No Change	No Change
Humid Resistance	60°Cx90% x 100hr		No Change	No Change
Thermal Cycle	-40°C ↔ 80°C (10 cycles)		No Change	No Change
ELECTRICAL				
Surface Resistivity	ASTM D-257	Ω	$> 10^{16}$	$> 10^{16}$
PENCIL HARDNESS			2H	6~8H
CHEMICAL				
Methyl Alcohol (50%)			No Change	No Change
Ethyl Alcohol (50%)			No Change	No Change
Soap Aqua Solution			No Change	No Change
Toluene			Dissolved	No Change
Acetone			Dissolved	No Change
Benzene			Swollen	No Change
Ethylene Dichloride			Dissolved	No Change
ADHESION	K-5400			100/100
FLAMMABILITY	UL standard	≥0.8mm Thickness	94HB	94HB