




CLAREX[®] Hard Coat Sheet

CLAREX[®] Hard Coat is applied to either side of the Cell-Cast PMMA sheet to provide scratch resistance.

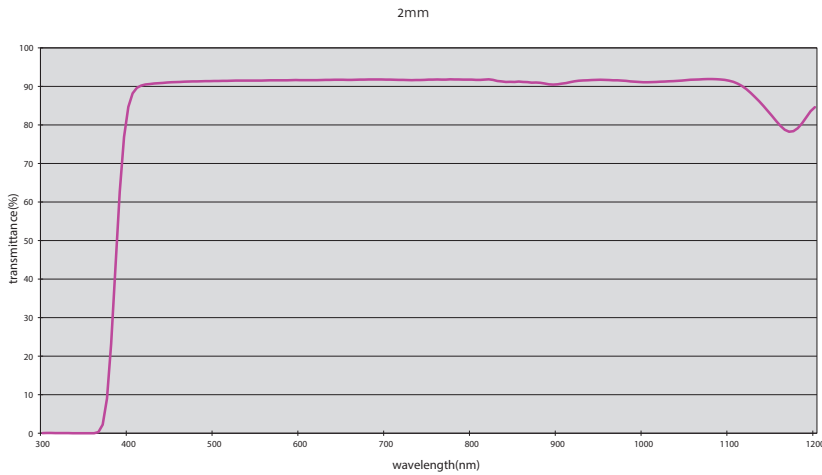

Clarex[®] Optical Grade Precision Sheet with a Hard Coat applied on one (RH10) or both sides (RH20).

A variety of standard substrate colours or bespoke colour matching is available.



6-8H surface hardness.

Available from 0.2 mm thickness.



Light Transmission of 92-94%, higher than glass material.

Ultra smooth glass-like surface.



No birefringence or double refraction, ideal for optical sensor cover application.

Excellent weather resistance.



Anti-Reflection Coating surface treatment also available for improved light transmission.

Non-Glare surface texture can also be applied.



Versatile substrate suitable for laser cutting, milling, printing, forming etc.

Outstanding optical characteristics.



Contact us